

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :

H04Q 7/24, 3/00

A1

(11) International Publication Number:

WO 99/39528

(43) International Publication Date:

5 August 1999 (05.08.99)

(21) International Application Number: PCT/FI98/00674

(22) International Filing Date: 31 August 1998 (31.08.98)

(30) Priority Data:

980208

29 January 1998 (29.01.98)

FI

(71) Applicant (for all designated States except US): NOKIA
TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4,
FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): VIALÉN, Jukka [FI/FI];
Tyrskykuja 3 B 13, FIN-02320 Espoo (FI). BRITSCHGI,
Juhana [FI/FI]; Mätästie 5 C 54, FIN-00770 Helsinki (FI).(74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER
OY; c/o Kolster Oy AB, Iso Roobertinkatu 23, P.O. Box
148, FIN-00121 Helsinki (FI).(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility
model), DE, DE (Utility model), DK, DK (Utility model),
EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE,
GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK
(Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ,
VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD,
SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD,
RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI
patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR,
NE, SN, TD, TG).

Published


With international search report.

In English translation (filed in Finnish).

(54) Title: METHOD FOR CONNECTION RECONFIGURATION IN CELLULAR RADIO NETWORK

(57) Abstract

The invention relates to a method for reconfiguring a cellular radio network connection (170) comprising a network part (128) having a connection (170) to a mobile station (150) through at least one radio bearer. According to the invention, a first party of the connection (170), i.e. the network part (128) or the mobile station (150), sends a second party of the connection (170), i.e. the mobile station (150) or the network part (128), a reconfiguration request message (BEARER_RECONF_REQ) concerning at least one radio bearer. The second party of the connection (170) possibly replies to this by sending the first party of the connection (170) a reply message (BEARER_COMPL/BEARER_FAIL) to the radio bearer reconfiguration request message (BEARER_RECONF_REQ). The radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least one radio bearer identifier (BID) and, for example, bearer quality of service (BEARER QOS) of the radio bearer in question. The possible reply message (BEARER_COMPL/BEARER_FAIL) comprises at least one radio bearer identifier (BID) and possibly also bearer quality of service (BEARER QOS) assigned to the radio bearer in question, or a cause (CAUSE) for a failed reconfiguration of the radio bearer in question.

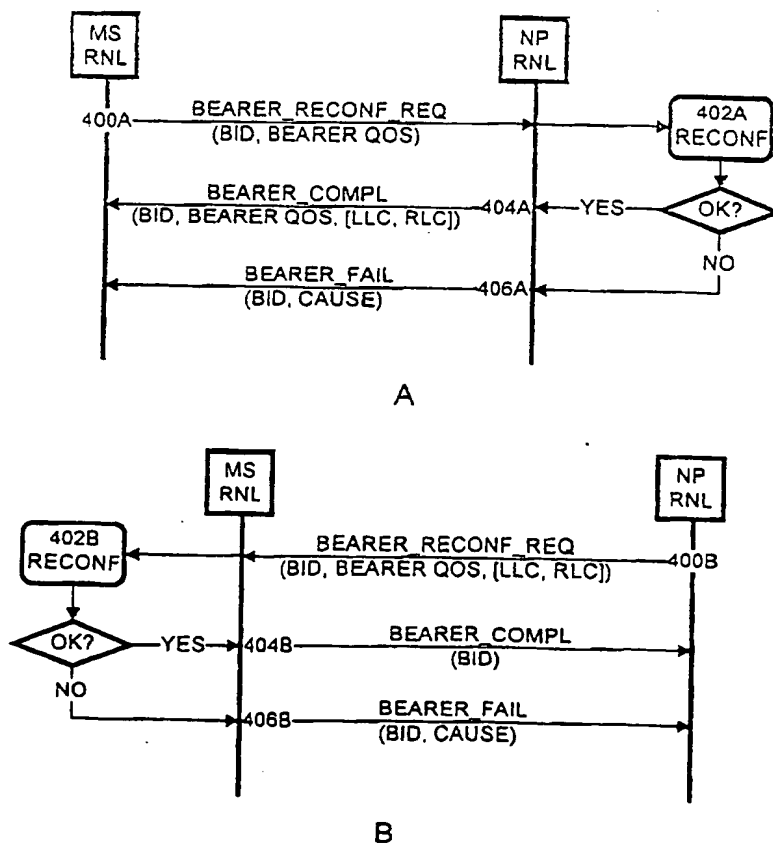

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD FOR CONNECTION RECONFIGURATION IN CELLULAR RADIO NETWORK

FIELD OF THE INVENTION

5 The invention relates to a method for reconfiguring a cellular radio network connection. The reconfiguration particularly concerns a radio bearer providing a connection between a network part and a mobile station.

BACKGROUND OF THE INVENTION

10 In the GSM system connection reconfiguration concerns the modifying of a call mode. The procedure is known as in-call modification. The term 'mode' means the operational status of a call; it can be for instance a standard speech mode, data mode, fax mode, an alternating speech/data mode or an alternating speech/fax mode. When a connection is reconfigured, its mode can thus be changed e.g. from a speech mode to a data mode. In case the channel used for the connection does not support the required characteristics, channel configuration can be changed. The solution known 15 from the GSM system is not, however, applicable for use in UMTS (Universal Mobile Telephone System) described below. The reason for this is that in the UMTS a single connection can simultaneously use one or more radio bearers. The characteristics of the radio bearers may have to be modified upon establishment of or during a connection. 20

The term 'radio bearer' refers to a service provided by a network layer. Multimedia service typically uses a plural number of radio bearers simultaneously for providing a service. Video telephony, for example, may require four different radio bearers: transmission of speech and image both 25 use separate radio bearers for uplink and downlink. A multimedia service, such as video telephony, can also be implemented by using only one radio bearer per transmission direction, thereby avoiding the problem of synchronization between radio bearers of the same transmission direction. Radio bearer parameters comprise most of the first and second layer operational parameters. A radio bearer user, however, does not know the parameters of 30 lower layers. Therefore the radio bearer user is not aware of how the radio bearer provides its services, i.e. whether it uses a half of a TDMA time slot, one time slot or a plural number of them, or one or more CDMA spreading codes.

35 A radio bearer is defined by a set of parameters or attributes that

concern the traffic or quality characteristics of a service provided. A radio bearer is not to be considered similar to a logical channel, which is a service provided by a data link layer.

BRIEF DESCRIPTION OF THE INVENTION

5 An object of the invention is therefore to provide a method and an equipment implementing the method in such a way that the above problems can be solved. This is achieved with the method described below, which is a method for reconfiguring a cellular radio network connection comprising a network part, the network part having a connection to a mobile station through
10 at least one radio bearer. According to the method, a first party of the connection sends to a second party of the connection a radio bearer reconfiguration request message involving at least one radio bearer; the second party of the connection sends to the first party of the connection a reply message to the radio bearer reconfiguration request message.

15 The invention also relates to a cellular radio network comprising: a protocol software of a network layer of a network part, the software being arranged to have a connection to a mobile station through at least one radio bearer; a protocol software of a network layer of the mobile station, the software being arranged to have a connection to the network part through at
20 least one radio bearer. The protocol software of the network layer of the network part is arranged to transmit to the protocol software of the network layer of the mobile station a radio bearer reconfiguration request message involving at least one radio bearer; the protocol software of the network layer of the mobile station is arranged to transmit to the protocol software of the
25 network layer of the network part a reply message to the radio bearer reconfiguration request message.

 The invention further relates to a cellular radio network comprising: a protocol software of a network layer of a network part, the software being arranged to have a connection to a mobile station through at least one radio
30 bearer; a protocol software of a network layer of the mobile station, the software being arranged to have a connection to the network part by means of at least one radio bearer. The protocol software of the network layer of the mobile station is arranged to transmit to the protocol software of the network layer of the network part a radio bearer reconfiguration request message
35 involving at least one radio bearer; the protocol software of the network layer of the network part is arranged to transmit to the protocol software of the

network layer of the mobile station a reply message to the radio bearer reconfiguration request message.

5 The invention further relates to a method for reconfiguring a cellular radio network connection comprising a network part, the network part having a connection to a mobile station through at least one radio bearer. A first party of a connection transmits to a second party of the connection a radio bearer reconfiguration request message involving at least one radio bearer.

The preferred embodiments of the invention are disclosed in the dependent claims.

10 The invention is based on that either of the communicating parties can request, when needed, a radio bearer reconfiguration.

A method and system of the invention provide several advantages. The solution enables reconfiguration to be flexibly implemented in a system employing radio bearers. A plural number of radio bearers can be
15 simultaneously reconfigured, the number of messages needed being thereby reduced, which in turn decreases the load on radio resources. When necessary, reconfiguration of radio bearers used for signalling can be carried out at connection set-up, thus avoiding a reallocation of signalling radio bearers that would perhaps otherwise be needed.

20 BRIEF DESCRIPTION OF THE DRAWINGS

In the following the invention will be described in greater detail in connection with preferred embodiments and with reference to the attached drawings, in which

25 Figure 1 illustrates an example of a cellular radio network structure;
Figure 2 illustrates a transceiver structure;

Figure 3 illustrates cellular radio network protocol stacks;

Figure 4A is a message sequence diagram illustrating a reconfiguration procedure of the invention initiated by a mobile station;

30 Figure 4B is a message sequence diagram illustrating a reconfiguration procedure of the invention initiated by a network part;

Figure 5 illustrates protocol stacks of an embodiment.

DETAILED DESCRIPTION OF THE INVENTION

35 With reference to Figure 1, a typical cellular radio network structure of the invention will be described. Figure 1 only comprises the blocks that are essential for the description of the invention, although it is apparent to a person skilled in the art that a common cellular radio network also comprises

other functions and structures which need not be discussed in greater detail here. The examples describe a cellular radio network employing TDMA (Time Division Multiple Access), the invention not being, however, restricted to it. The invention can be applied to GSM-based cellular radio networks, in other words, to systems that are at least partially based on GSM specifications. One example is the UMTS (Universal Mobile Telephone System).

A cellular radio network typically comprises a fixed network infrastructure, i.e. a network part 128, and mobile stations 150, which may be fixedly mounted, vehicle mounted or hand-held portable terminals. The network part 128 comprises base stations 100. A plural number of base stations 100 are, in turn, controlled in a centralized manner by a base station controller 102 communicating with them. A base station 100 comprises transceivers 114. A base station 100 typically comprises 1-16 transceivers 114. In TDMA radio systems, for example, a transceiver 114 offers radio capacity to one TDMA frame, i.e. typically to eight time slots.

The base station 100 comprises a control unit 118 which controls the operation of the transceivers 114 and a multiplexer 116. The multiplexer 116 arranges traffic and control channels used by a plural number of transceivers 114 on a single data link 160.

The transceivers 114 of the base station 100 have a connection to an antenna unit 112 which is used for providing a bi-directional radio connection 170 to a mobile station 150. The structure of the frames transmitted in the bi-directional radio connection 170 is also determined in detail and the connection is referred to as an air interface.

Figure 2 illustrates in greater detail the structure of a transceiver 114. A receiver 200 comprises a filter blocking frequencies outside a desired frequency band. A signal is then converted to an intermediate frequency or directly to baseband, and in this form the signal is sampled and quantized in an analog-to-digital converter 202. An equalizer 204 compensates for interference caused for instance by multi-path propagation. From the equalized signal, a demodulator 206 takes a bit stream, which is transmitted to a demultiplexer 208. The demultiplexer 208 separates the bit stream from the separate time slots into its logical channels. A channel codec 216 decodes the bit stream of the separate logical channels, i.e. decides whether the bit stream is signalling data, which is transmitted to a control unit 214, or whether the bit stream is speech, which is transmitted 240 to a speech codec 122 of the base

station controller 102. The channel codec 216 also performs error correction. The control unit 214 performs internal control functions by controlling different units. A burst former 228 adds a training sequence and a tail to the data arriving from the speech codec 216. A multiplexer 226 assigns a specific time slot to each burst. A modulator 224 modulates digital signals to a radio frequency carrier. This operation has an analog nature, therefore a digital-to-analog converter 222 is needed for performing it. A transmitter 220 comprises a filter restricting the bandwidth. In addition, the transmitter 220 controls the output power of a transmission. A synthesizer 212 arranges the necessary frequencies for the different units. The synthesizer 212 comprises a clock which may be locally controlled or it can be centrally controlled from somewhere else, for instance from the base station controller 102. The synthesizer 212 creates the necessary frequencies by means of a voltage controlled oscillator, for example.

As shown in Figure 2, the structure of the transceiver can be further divided into radio frequency parts 230 and a digital signal processor including software 232. The radio frequency parts 230 comprise the receiver 200, the transmitter 220 and the synthesizer 212. The digital signal processor including software 232 comprises equalizer 204, demodulator 206, demultiplexer 208, channel codec 216, control unit 214, burst former 228, multiplexer 226 and modulator 224. The analog-to-digital converter 202 is needed for converting an analog radio signal to a digital signal and, correspondingly, the digital-to-analog converter 222 is needed for converting a digital signal to an analog signal.

The base station controller 102 comprises a group switching field 120 and a control unit 124. The group switching field 120 is used for switching speech and data and for connecting signalling circuits. The base station 100 and the base station controller 102 form a Base Station System 126 which additionally comprises a transcoder 122. The transcoder 122 is usually located as close to a mobile switching centre 132 as possible because this allows speech to be transmitted between the transcoder 122 and the base station controller 102 in a cellular radio network form, which saves transmission capacity. In the UTMS the base station controller 102 can be referred to as an RNC (Radio Network Controller).

The transcoder 122 converts different digital speech coding modes used between a public switched telephone network and a cellular radio

network, to make them compatible, for instance from the 64 kbit/s fixed network form to another form (such as 13 kbit/s) of the cellular radio network, and vice versa. The control unit 124 carries out call control, mobility management, collection of statistical data and signalling.

5 The UMTS uses an IWU 190 (Interworking Unit) to make the base station system 126 interwork with a second generation GSM mobile switching centre 132 or a second generation packet transmission network support node 180. The IWU is not needed when the base station system is connected to an UMTS mobile switching centre or to an UMTS support node. As shown in
10 Figure 1, a circuit-switched connection can be established from the mobile station 150 via the mobile switching centre 132 to a telephone 136 connected to a PSTN (Public Switched Telephone Network) 134. A packet-switched connection, such as GSM phase 2+ packet transmission, i.e. GPRS (General Packet Radio Service), can also be used in a cellular radio network. The
15 connection between a packet network 182 and the IWU 190 is created by a support node 180 (SGSN = Serving GPRS Support Node). The function of the support node 180 is to transfer packets between the base station system and a gateway node (GGSN = Gateway GPRS Support Node) 184 and to keep record of the mobile station's 150 location within its area.

20 The IWU 190 can be a physically separate device, as in Figure 1, or it can be integrated as part of the base station controller 102 or the mobile switching centre 132. As Figure 1 shows, when transcoding of the data to be transferred is not allowed, packet transmission data is not necessarily transferred through the transcoder 122 between the IWU 190 and the group
25 switching field 120.

 The gateway node 184 connects the packet network 182 and a public packet network 186. The interface can be provided by an Internet protocol or an X.25 protocol. The gateway node 184 encapsulates the internal structure of the packet network 182, thus masking it from the public packet
30 network 186, so for the public packet network 186 the packet network 182 looks like a sub-network, and the public packet network can address packets to a mobile station 150 located in the sub-network and receive packets from it.

 A typical packet network 182 is a private network applying an Internet protocol and conveying signalling and tunnelled user data. The
35 structure of the network 182 can vary according to operator, both as regards its architecture and its protocols below the Internet protocol layer.

The public packet network 186 can be for instance a global Internet network into which a terminal 188, for instance a server, with a connection to the network wants to transmit packets addressed to the mobile station 150.

5 The mobile switching centre 132 is connected to an OMC (Operations and Maintenance Centre) controlling and monitoring the operation of a radio telephone system. The OMC 132 is usually a fairly efficient computer provided with a specific software. The control can also involve separate parts of the system, because control channels needed for control data transfer can be arranged on data transmission connections established
10 between different parts of the system.

Further, the personnel installing a network and controlling the operations possibly have a portable computer including an EM (Element Manager) 140 at their disposal for the management of separate network elements. The Figure shows an example in which the device 140 is connected
15 to a data transmission port located in the control unit 118 of the base station 100, thus enabling the operation of the base station 100 to be monitored and controlled, for instance by examining and changing the values of parameters regulating the operation of the base station.

The structure of the mobile station 150 can be described utilizing the description of the transceiver 114 in Figure 2. The structural parts of the
20 mobile station 150 are operationally the same as those of the transceiver 114. The mobile station 150 additionally comprises: a duplex filter between the antenna 112 and the receiver 200 and between the antenna 112 the transmitter 220, interface parts and a speech codec. The speech codec is
25 connected to a channel codec 216 via a bus 240.

Since the present invention relates to the processing of protocols used in a cellular radio network, an example illustrating the implementation of the necessary protocol stacks will be described with reference to Figure 3. The
30 left-most protocol stack in Figure 3 is a protocol stack located at the mobile station 150. The next protocol stack is in the base station system 126. A third protocol stack is located in the IWU 190. The right-most protocol stack is located in the mobile switching centre 132. The air interface 170 provided by means of the radio connection 170 between the mobile station 150 and the base station system can also be referred to as an Um interface. An interface
35 162 between the base station system 126 and the mobile switching centre 132 is called an A interface. The interface between the base station system 126

and the IWU is an lu interface 300.

The protocol stacks are formed according to an OSI (Open Systems Interconnection) model of the ISO (International Standardization Organization). In the OSI model protocol stacks are divided into layers. There
5 can be seven layers. A layer in each device 150, 126, 190, 132 communicates logically with a layer in another device. Only the lowest, physical layers communicate with each other directly. Other layers always use services provided by the layer below. A message must therefore physically travel in a vertical direction between the layers, and only in the lowest layer the message
10 travels horizontally between the layers.

The actual bit level data transmission takes place through the lowest (the first) layer, i.e. a physical layer Layer 1. In the physical layer are determined mechanical, electronic and operational characteristics for connecting to a physical transmission link. The physical layer in the air
15 interface 170 of the GSM is provided by means of TDMA technology. In the UMTS the physical layer is provided by using WCDMA and TD/CDMA. The physical layer provides a second layer with transport services on transport channels. The transport channels are RACH (Random Access Channel), FACH (Forward Access Channel), PCH (Paging Channel), BCH (Broadcast
20 Channel) and DCH (Dedicated Channel). Transport channels determine the method and the parameters for transferring data in the physical layer. Transport channel parameters include: encoding, i.e. outer and inner coding, interleaving, bit rate and mapping to physical channels. In WCDMA the physical channel used by the transport channels is determined by codes. A
25 channelization code, i.e. spreading code, determines the spreading ratio, thus determining also the maximum bit rate to be used. The channelization code is separately determined for uplink and downlink and, depending on the bit rate needed, one or more parallel codes can be simultaneously used. A scrambling code, in turn, separates different mobile stations from one another on uplink and different cells or sectors of cells on downlink.
30

The next (the second) layer, i.e. a data link layer, uses the services of the physical layer to provide reliable data transmission, which includes correction of transmission errors, for example. The data link provides upper
35 layers with data transmission services on logical channels. The logical channels comprise CCCH (Common Control Channel), PCCH (Paging Control Channel), BCCH (Broadcast Control Channel), DCCH (Dedicated Control

Channel) and DTCH (Dedicated Traffic Channel). The logical channels determine the data to be transmitted, unlike transport channels, which determine the method and the parameters to be used for transferring data. The DTCH provides services to upper layers of a user plane, all the other
5 logical channels to upper protocol layers of a control plane.

The data link layer at the air interface 170 is divided into an RLC/MAC sublayer and an LLC sublayer. In the RLC/MAC sublayer, the RLC part is responsible for segmenting and collecting the data to be transmitted. In addition, the RLC part masks quality fluctuations in the radio interface 170 of
10 the physical layer from the upper layers. A sublayer RRC, to be described later, controls the allocation, reconfiguration and releasing of physical code channels and the transport channels provided by the physical layer. The MAC part carries out the actual allocation/configuration/releasing by command of the RRC sublayer. The MAC part can also indicate to the RRC sublayer that
15 allocation is needed. On the user plane the LLC sublayer controls the data flow at the interface between the second and the third layer. The LLC transfers the received data flow on the radio connection 170 through error detection and correction levels required by the quality of service of the offered service. On the control plane, a radio network sublayer described below communicates
20 directly with the RLC/MAC sublayer.

The third layer, i.e. the network layer, offers to the upper level independence of data transmission and switching techniques taking care of the connection between mobile stations. The network layer carries out connection set-up, maintenance and releasing, for example. A GSM network
25 layer is also known as a signalling layer. It has two main functions: to route messages and to provide for the possibility of a plural number of independent, simultaneous connections between two entities.

The network layer of a common GSM system comprises a connection management sublayer CM, a mobility management sublayer MM and a radio resource management sublayer.
30

The radio resource management sublayer is responsible for frequency spectrum management and for the reactions of the system to changing radio circumstances. It is further responsible for maintaining a high-quality channel, e.g. by taking care of channel selection, the releasing of a
35 channel, possible frequency hopping sequences, power adjustment, timing, reception of mobile station measurement reports, adjustment of a timing

advance, ciphering settings, handover between cells. Messages of this sublayer are transferred between the mobile station 150 and the base station controller 102.

5 The mobility management sublayer MM handles such consequences caused by the mobility of a mobile station user which do not directly relate to the operation of the radio resource management sublayer. In a fixed network this sublayer would take care of checking user authorities and connecting the user to the network. In cellular radio networks the sublayer in question thus supports user mobility; registration and management of data
10 caused by mobility. The sublayer also checks mobile station identity and the identities of the services allowed. Data transmission concerning the sublayer takes place between the mobile station 150 and the mobile switching centre 132.

15 The connection management sublayer CM manages all operations associated with circuit-switched call management. The operations involved are provided by a call management entity. In addition, other services, such as SMS (Short Message Service), are provided by separate entities. The connection management sublayer does not detect user mobility. The GSM connection management sublayer operations are therefore almost directly
20 inherited from the ISDN (Integrated Services Digital Network) of the fixed network. The call management entity sets up, maintains and releases calls. It has specific procedures which it applies to calls originated by and terminating to the mobile station 150. Also in this sublayer messages are transferred between the mobile station 150 and the mobile switching centre 132.

25 The TDMA technique employed in an ordinary physical GSM layer is replaced in the UMTS by a broadband CDMA technique (Code Division Multiple Access) when different frequency bands are used for uplink and for downlink and by a broadband combination of CDMA and TDMA techniques when one and the same frequency band based on a time division duplex
30 method is used for both uplink and downlink. In this case the GSM radio resources management sublayer can not be re-used in the UMTS, but it is replaced by a radio network sublayer RNL providing corresponding services upward. The radio network sublayer can be divided into RBC (Radio Bearer Control) and RRC (Radio Resource Control) sublayers, but it can also be kept
35 as a single entity. When kept as a single entity, it can also be called an RRC sublayer. If the division into sublayers is applied, then the RRC sublayer

performs e.g. broadcasting and paging of cell data, processing of mobile station 150 measurement results, and handovers. The RBC sublayer provides the logic connection establishment, thereby determining e.g. radio bearer bit rate, bit/error ratio and whether the transmission concerned is packet-switched or circuit-switched.

When upper protocol layers of second generation systems are used as such, the mobile station 150 needs a UAL (UMTS Adaptation Layer) sublayer between the mobility management and radio network sublayers, the UAL sublayer changing the primitives of a upper mobility management sublayer to primitives of a lower radio network sublayer. The UAL layer enables a plural number of separate mobility management sublayers (such as GPRS and GSM mobility management sublayers) to be arranged into one and the same radio network sublayer.

The only network sublayers processed in the base station system 126 are the radio network sublayer; messages of the connection management and mobility management sublayers are transparently processed, in other words, they are simply transferred back and forth through specific sublayers. A RANAP sublayer (Radio Access Network Application Part) provides procedures for negotiating and managing both circuit-switched and packet-switched connections. It corresponds to BSSAP (Base Station System Application Part) in the GSM, BSSAP comprising BSSMAP (Base Station System Management Part) and DTAP (Direct Transfer Application Part).

Lower layers of the lu interface 300 can be implemented for instance by means of ATM (Asynchronous Transfer Mode) protocols: SAAL/SS7 (Signalling ATM Adaptation Layer / Signalling System Number 7), AAL (ATM Adaptation Layer).

The IWU 190 comprises RANAP, SAAL/SS7, AAL sublayers and physical layers corresponding to those of the base station system 126.

The IWU 190 and the mobile switching centre 132 further comprise a BSSMAP sublayer through which data associated with a particular mobile station 150 and control data associated with the base station system 126 are transferred between the IWU 190 and the mobile switching centre 132.

In the A interface the first and the second sublayer are implemented by means of MTP and SCCP sublayers (Message Transfer Part, Signalling Connection Control Part). Their structure is simpler than in the air interface 170, because mobility management, for example, is not needed.

As we have now described, with reference to Figures 1, 2 and 3, an example of a system and system protocols where the invention can be used, we can proceed to describe the actual method of the invention. The above protocol description showed that the operation according to the invention takes place in the radio network sublayer RNL in particular, and specifically in its RBC sublayer, if the sublayer division in question is applied.

If the division into sublayers is not applied, then there is no RBC sublayer and therefore the radio network sublayer RNL can be termed an RRC sublayer, according to its only sublayer; protocol stacks of a preferred embodiment based on this are illustrated in Figure 5. Since the invention mainly concerns the control plane, Figure 5 only shows control plane protocol stacks. The main parts of a mobile phone system are a core network, a UMTS terrestrial radio access network UTRAN and a mobile station MS. The mobile station can also be referred to as a UE (User Equipment). The interface between the core network and UTRAN is called Iu and the air interface between UTRAN and a mobile station is called Uu.

UTRAN comprises radio network subsystems. A radio network subsystem comprises a radio network controller and one or more so-called B nodes, i.e. base stations, so it is approximately similar to a GSM base station system.

The core network comprises a mobile phone system infrastructure outside UTRAN, such as a mobile switching centre.

Figure 5 illustrates protocol stacks used by the mobile station MS, the radio access network UTRAN and the mobile switching centre MSC. Unlike in Figure 3, the IWU is not shown because it is assumed that the mobile switching centre MSC employed is designed for the UMTS. The physical layer in the air interface Uu is implemented by means of a broadband CDMA technique WCDMA L1. The RLC and MAC sublayers follow next. The LLC sublayer is not used on the control plane, the RRC sublayer being directly connected to the RLC/MAC sublayer. Lower transport layers TRANSPORT LAYERS of the Iu interface are not illustrated in such detail as in Figure 3, because they can be implemented in various ways. Otherwise the description of Figure 3 also applies, to the extent appropriate, to Figure 5.

Figure 4A is a message sequence diagram illustrating how the mobile station radio network sublayer MS RNL communicates with the network part radio network sublayer NP RNL when performing radio bearer

reconfiguration. Figure 4A does not show all details of the communication, i.e. how messages travel in lower data link layers and physical layers. The communication illustrated is known as a peer-to-peer communication. The reconfiguration request message is a radio network sublayer message.

5 Radio bearer reconfiguration can be initiated by

1. an upper layer, after service parameters are negotiated on a call control plane;

2. the RRC sublayer, by applying algorithms guiding the use of radio resources;

10 3. even a lower level, such as a MAC sublayer, because of its traffic volume monitoring, or a physical layer, after it has reached the maximum transmission power limit.

The reason for reconfiguration may be an overload situation or degradation of the radio bearer quality, for example. Radio bearer reconfiguration can be requested both by the sender and the receiver: the sender when needing for instance additional capacity, and the receiver when detecting that the quality is too low.

15 In Figure 4A the mobile station radio network sublayer MS RNL sends 400A a reconfiguration request message BEARER_RECONF_REQ to the network part radio network sublayer. The message comprises a radio Bearer Identifier BID and Quality of Service BEARER QOS of the bearer in question. The message may comprise more than one BID/BEARER QOS pair, i.e. one message can be used for requesting the reconfiguration of a plural number of separate radio bearers.

25 The requested reconfiguration 402A is carried out in the network part. If the reconfiguration is successful, the network part sends 404A a reply message BEARER_COMPL informing that the reconfiguration succeeded. The reply message comprises the radio bearer identifier BID and the quality of service BEARER QOS provided. Depending on the implementation, parameters of the LLC sublayer and/or the RLC sublayer can also be transferred. Another option is that the mobile station decodes from the quality of service parameter BEARER QOS the LLC sublayer and/or RLC sublayer parameters concerned, in which case they need not be transferred in the reply message BEARER_COMPL.

30 If the reconfiguration fails, the network part sends 406A a reply message BEARER_FAIL informing that the reconfiguration failed. In this case

the reply message comprises the radio bearer identifier BID and a cause CAUSE for the failure of the reconfiguration.

If the radio network sublayer MS RNL requested in the reconfiguration request message BEARER_RECONF_REQ the reconfiguration of several radio bearers and in case all the reconfigurations succeed, the reply message BEARER_COMPL is sent, all the above described parts being repeated in the message for each radio bearer. Likewise, in case all the reconfigurations fail, the above described reply message BEARER_FAIL is sent, the above described parts, i.e. the radio bearer identifier BID and the cause CAUSE for the failure of its reconfiguration, being repeated in the message for each radio bearer. In case some of the reconfigurations succeed and others fail, separate reply messages are sent for the successful reconfigurations and for the failed ones, or only one message combining the structures of the successful reconfiguration reply message BEARER_COMPL and the failed reconfiguration reply message BEARER_FAIL is sent. In this case the structure of the reply message is for instance the following: (BID, BEARER QOS, [LLC, RLC], BID, CAUSE). Let us assume that three separate radio bearers having identifiers bid1, bid2 and bid3 were to be configured. Let us further assume that the reconfiguration of bid1 was successful whereas the reconfiguration of the others failed. In this case a single reply message comprises the following: bid1, bid1 qos, [bid1 llc, bid1 rlc], bid2, bid2 cause, bid3, bid3 cause.

Having received the reply message the protocol software of the mobile station changes either its transmission or its reception parameters as a result of the successful reconfiguration, or it starts to plan its next procedure as a result of a failed reconfiguration.

Another way to carry out radio bearer reconfiguration initiated by a mobile station is one in which the mobile station signals on a call control plane to the mobile switching centre that parameters of a user service need to be reconfigured. The mobile switching centre transmits the service parameters to the radio network controller where they are changed into radio bearer parameters. The actual reconfiguration is then carried out in the same way as if the network part had initiated it, i.e. as shown in Figure 4B.

Figure 4B illustrates a reconfiguration procedure initiated by the network part. The network part radio network sublayer NP RNL sends 400B a

reconfiguration request message BEARER_RECONF_REQ to the peer MS RNL located at the mobile station. Again, the reconfiguration request message BEARER_RECONF_REQ comprises one or more radio bearer identifiers BID and corresponding quality of service BEARER QOS parameters. Since the
5 LLC sublayer and RLC sublayer parameters are decided in the network part, the network part radio network sublayer NP RNL can directly transfer the parameters LLC, RLC in question in the reconfiguration message BEARER_RECONF_REQ. The mobile station radio network sublayer MS RNL initiates the reconfiguration 402B. After a successful reconfiguration the mobile
10 station sends 404B the reply message BEARER_COMPL, the only parameter of which is the radio bearer identifier BID. After a failed reconfiguration the mobile station sends 406B the reply message BEARER_FAIL comprising the radio bearer identifier BID and the cause CAUSE of the failure as parameters. As described in connection with Figure 4A, a plural number of radio beares
15 can be simultaneously reconfigured and, similarly, the reply message can be a combination of reply messages to a successful and a failed reconfiguration.

In a preferred embodiment, a completed reconfiguration does not require a separate reply message to be sent, instead, the parties observe the success or failure of the reconfiguration by detecting the synchronization of the
20 first layer after the operation has been carried out. Therefore the reply message normally sent after synchronization is left out.

In a preferred embodiment the BEARER_RECONF_REQ parameters comprise at least one of the following parameters:

radio bearer identifier BID;

25 radio bearer quality of service BEARER QOS of the bearer concerned;

radio bearer cipher parameters, such as cipher mode on/off, optionally a cipher algorithm or key;

30 RLC/MAC sublayer processing parameters, such as: RLC protocol unit size, temporary mobile station identity or a transport format set, the MAC sublayer selecting from the transport format set one transport format for each physical layer frame of ten milliseconds on the basis of the bit rate needed at a particular moment;

35 physical layer processing parameters, such as a downlink channelization code, optionally an uplink channelization code;

time of change indicator, i.e. the number of the frame from which on

the reconfiguration is to be carried out.

5 A difference in the principle of the reconfiguration methods illustrated in Figures 4A and 4B is that the network part has more power of decision. In a method according to Figure 4A the network part can change the quality of service requested by the mobile station, whereas a mobile station according to Figure 4B can only either approve or reject the quality of service determined by the network part. When the mobile station has to reject the reconfiguration requested by the network part, it possibly starts to release the radio bearer or to perform handover.

10 Reconfiguration can be carried out both for signalling radio bearers and communication radio bearers.

15 The radio bearer quality of service BEARER QOS can be indicated in various ways. The most typical way is to use at least one parameter indicating the quality of service. The parameter may well guide the operation of the protocols directly, by providing the LLC and the RLC sublayers directly with operational parameters, for example. A parameter can also denote different quality aspects, such as a maximum bit error rate, a maximum transmission delay allowed, a transmission delay deviation, radio bearer priority, radio bearer security, data loss at handover, i.e. whether it is allowed to lose data in connection with handover.

20 The invention is advantageously implemented by software, the invention thus requiring functions in the protocol processing software located in the control unit 124 of the base station controller 102 and into the protocol processing software located in the transceiver processor 214 of the mobile station 150.

25 Even though the invention is described above with reference to an example shown in the attached drawings, it is apparent that the invention is not restricted to it, but can vary in many ways within the inventive idea disclosed in the attached claims.

CLAIMS

1. A method for reconfiguring a cellular radio network connection (170) comprising a network part (128), the network part (128) having a connection (170) to a mobile station (150) through at least one radio bearer,
5 **characterized** in that

a first party of the connection (170) sends to a second party of the connection (170) a radio bearer reconfiguration request message (BEARER_RECONF_REQ) concerning at least one radio bearer;

10 the second party of the connection (170) sends to the first party of the connection (170) a reply message (BEARER_COMPL/BEARER_FAIL) to the radio bearer reconfiguration request message (BEARER_RECONF_REQ).

2. A method according to claim 1, **characterized** in that the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least one radio bearer identifier (BID) and bearer quality of service (BEARER QOS) of the radio bearer in question.
15

3. A method according to claim 1, **characterized** in that the reply message (BEARER_COMPL/BEARER_FAIL) comprises at least one radio bearer identifier (BID), and possibly also a bearer quality of service (BEARER QOS) assigned to the radio bearer in question or a cause (CAUSE) for a failed reconfiguration of the radio bearer in question.
20

4. A method according to claim 2 or 3, **characterized** in that the quality of service (BEARER QOS) is indicated by at least one parameter.

5. A method according to claim 4, **characterized** in that the parameter is for example bit error rate, maximum transmission delay, transmission delay deviation, priority, security, data loss at handover.
25

6. A method according to claim 4, **characterized** in that the parameter is at least one LLC sublayer parameter.

7. A method according to claim 4, **characterized** in that the parameter is at least one RLC sublayer parameter.
30

8. A method according to claim 1, **characterized** in that the radio bearer is used for signalling.

9. A method according to claim 1, **characterized** in that the radio bearer is used for communication.

10. A cellular radio network comprising
35 a protocol software (124) of a network layer of a network part (128), the software being arranged have a connection (170) to a mobile station (150)

through at least one radio bearer;

a protocol software (214) of a network layer of the mobile station (150), the software being arranged to have a connection (170) to the network part (128) through at least one radio bearer,

5 **characterized** in that

the protocol software (124) of the network layer of the network part (128) is arranged to transmit to the protocol software of the network layer of the mobile station (150) a radio bearer reconfiguration request message concerning at least one radio bearer;

10 the protocol software (214) of the network layer of the mobile station (150) is arranged to transmit to the protocol software (124) of the network layer of the network part (128) a reply message to the radio bearer reconfiguration request message.

15 11. A cellular radio network according to claim 10, **characterized** in that the radio bearer reconfiguration request message comprises at least one radio bearer identifier and the quality of service of the radio bearer in question.

20 12. A cellular radio network according to claim 10, **characterized** in that the reply message comprises at least one radio bearer identifier, and possibly also a cause for a failed reconfiguration of the radio bearer in question.

13. A cellular radio network according to claim 11 or 12, **characterized** in that the quality of service is arranged to be indicated by at least one parameter.

25 14. A cellular radio network according to claim 13, **characterized** in that the parameter is for example bit error rate, maximum transmission delay, transmission delay deviation, priority, security, data loss at handover.

30 15. A cellular radio network according to claim 13, **characterized** in that the parameter is at least one LLC sublayer parameter.

16. A cellular radio network according to claim 13, **characterized** in that the parameter is at least one RLC sublayer parameter.

35 17. A cellular radio network according to claim 9, **characterized** in that the radio bearer is arranged to be used for

signalling.

18. A cellular radio network according to claim 9, **characterized** in that the radio bearer is arranged to be used for communication.

5 19. A cellular radio network comprising
a protocol software (124) of a network layer of a network part (128),
the software being arranged have a connection (170) to a mobile station (150)
through at least one radio bearer;

10 a protocol software (214) of a network layer of the mobile station
(150), the software being arranged to have a connection (170) to the network
part (128) through at least one radio bearer,

characterized in that

15 the protocol software (214) of the network layer of the mobile
station (150) is arranged to transmit to the protocol software (124) of the
network layer of the network part (128) a radio bearer reconfiguration request
message concerning at least one radio bearer;

20 the protocol software (124) of the network layer of the network part
(128) is arranged to transmit to the protocol software of the network layer of
the mobile station (150) a reply message to the radio bearer reconfiguration
request message.

20. A cellular radio network according to claim 19,
characterized in that the radio bearer reconfiguration request
message comprises at least one radio bearer identifier and quality of service
of the radio bearer in question.

25 21. A cellular radio network according to claim 19,
characterized in that the reply message comprises at least one radio
bearer identifier, and possibly also bearer quality of service assigned to the
radio bearer in question or a cause for a failed reconfiguration of the radio
bearer in question.

30 22. A cellular radio network according to claim 20 or 21,
characterized in that the quality of service is arranged to be indicated
by at least one parameter.

35 23. A cellular radio network according to claim 22,
characterized in that the parameter is for example bit error rate,
maximum transmission delay, transmission delay deviation, priority, security,
data loss at handover.

24. A cellular radio network according to claim 22, **characterized** in that the parameter is at least one LLC sublayer parameter.

5 25. A cellular radio network according to claim 22, **characterized** in that the parameter is at least one RLC sublayer parameter.

26. A cellular radio network according to claim 19, **characterized** in that the radio bearer is arranged to be used for signalling.

10 27. A cellular radio network according to claim 19, **characterized** in that the radio bearer is arranged to be used for communication.

28. A method for reconfiguring a cellular radio network connection (170) comprising a network part (128), the network part (128) having a
15 connection (170) to a mobile station (150) through at least one radio bearer, **characterized** in that a first party of the connection (170) sends to a second party of the connection (170) a radio bearer reconfiguration request message (BEARER_RECONF_REQ) concerning at least one radio bearer.

29. A method according to claim 28, **characterized** in that
20 the second party of the connection (170) sends to the first party of the connection (170) a reply message (BEARER_COMPL/BEARER_FAIL) to the radio bearer reconfiguration request message (BEARER_RECONF_REQ).

30. A method according to claim 28, **characterized** in that
25 the parties of the connection (170) detect the success of the reconfiguration by monitoring physical layer synchronization.

31. A method according to claim 28, **characterized** in that
the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least one radio bearer identifier (BID).

32. A method according to claim 28, **characterized** in that
30 the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least bearer quality of service (BEARER QOS) of the radio bearer in question.

33. A method according to claim 28, **characterized** in that
35 the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least cipher parameters of the radio bearer.

34. A method according to claim 28, **characterized** in that

the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least RLC/MAC sublayer processing parameters.

35. A method according to claim 28, **characterized** in that the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least physical layer processing parameters.

36. A method according to claim 28, **characterized** in that the radio bearer reconfiguration request message (BEARER_RECONF_REQ) comprises at least a starting time indicator, i.e. the number of the frame from which on the parameters determined by the reconfiguration must be used.

37. A method according to claim 28, **characterized** in that the radio bearer is used for signalling.

38. A method according to claim 28, **characterized** in that the radio bearer is used for communication.

1 / 5

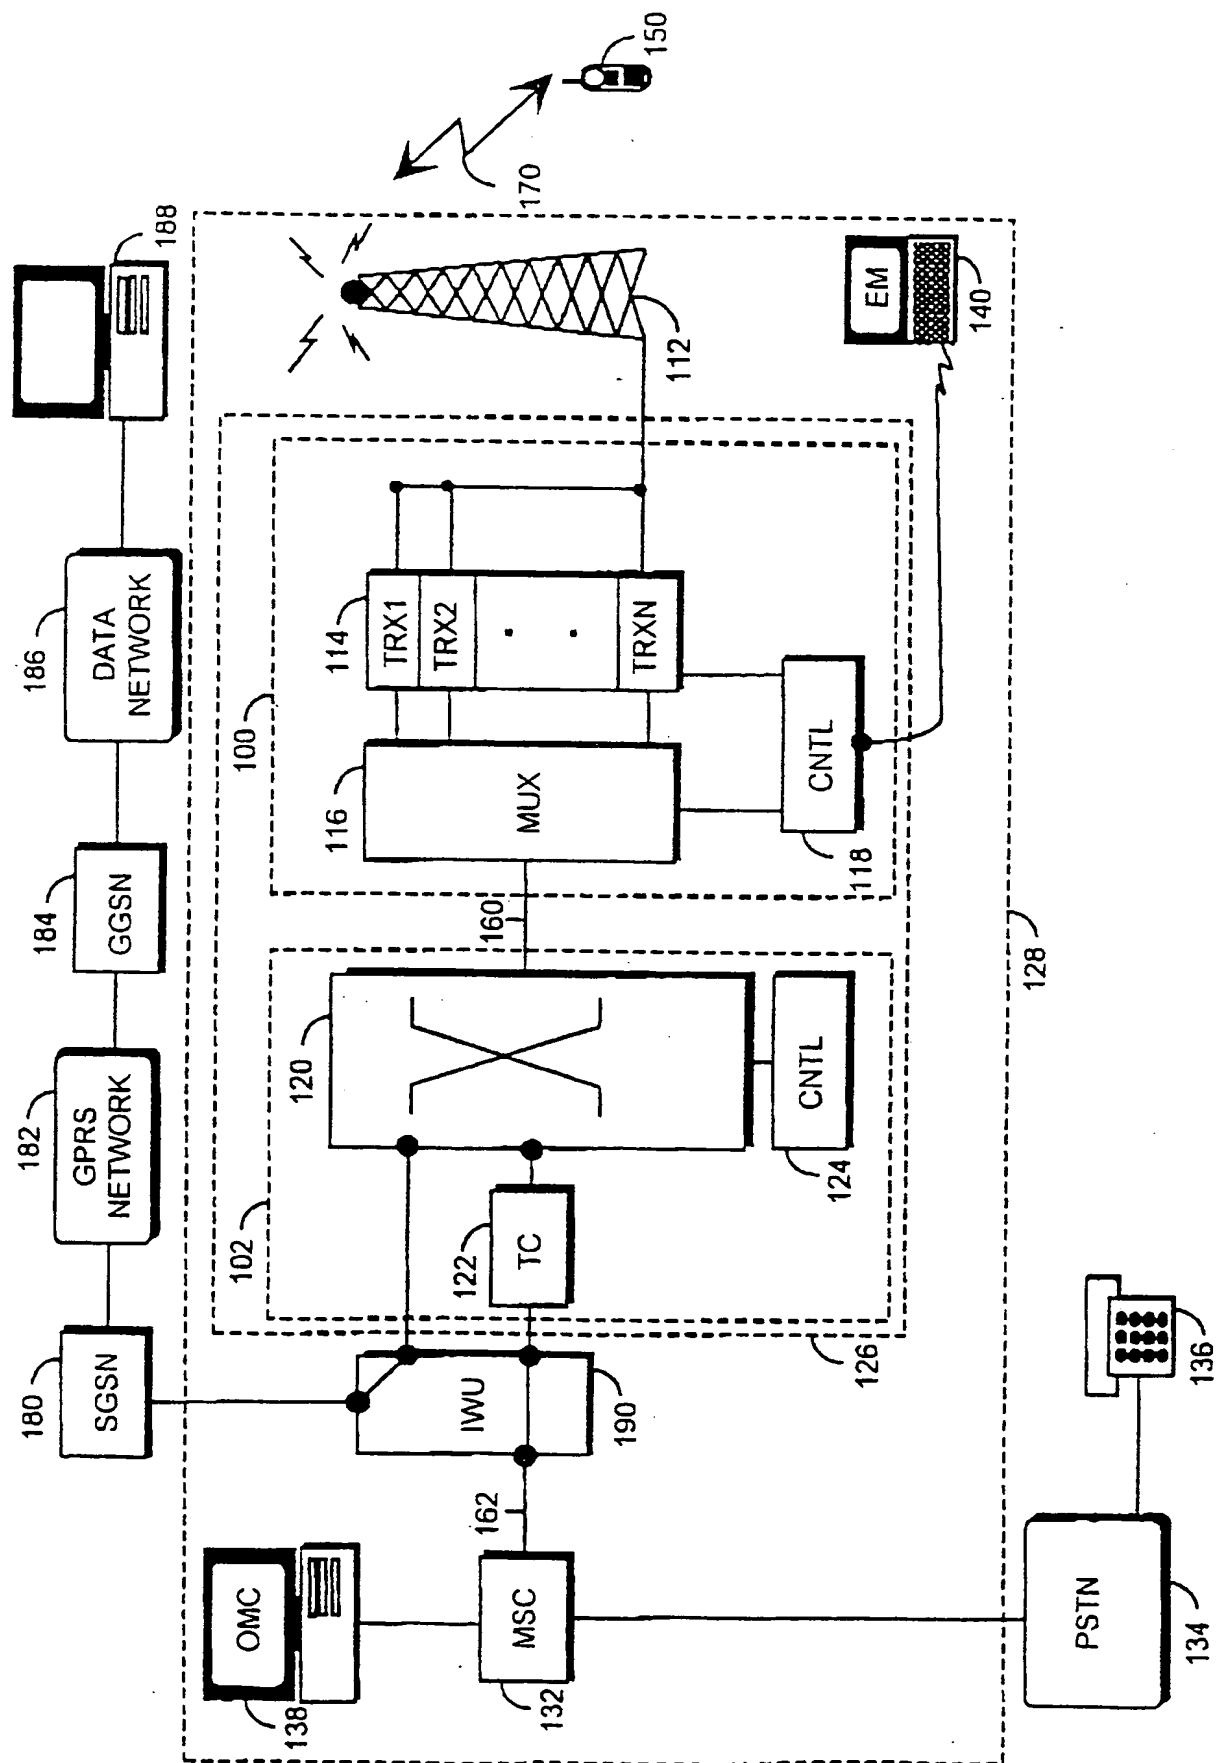


Fig 1

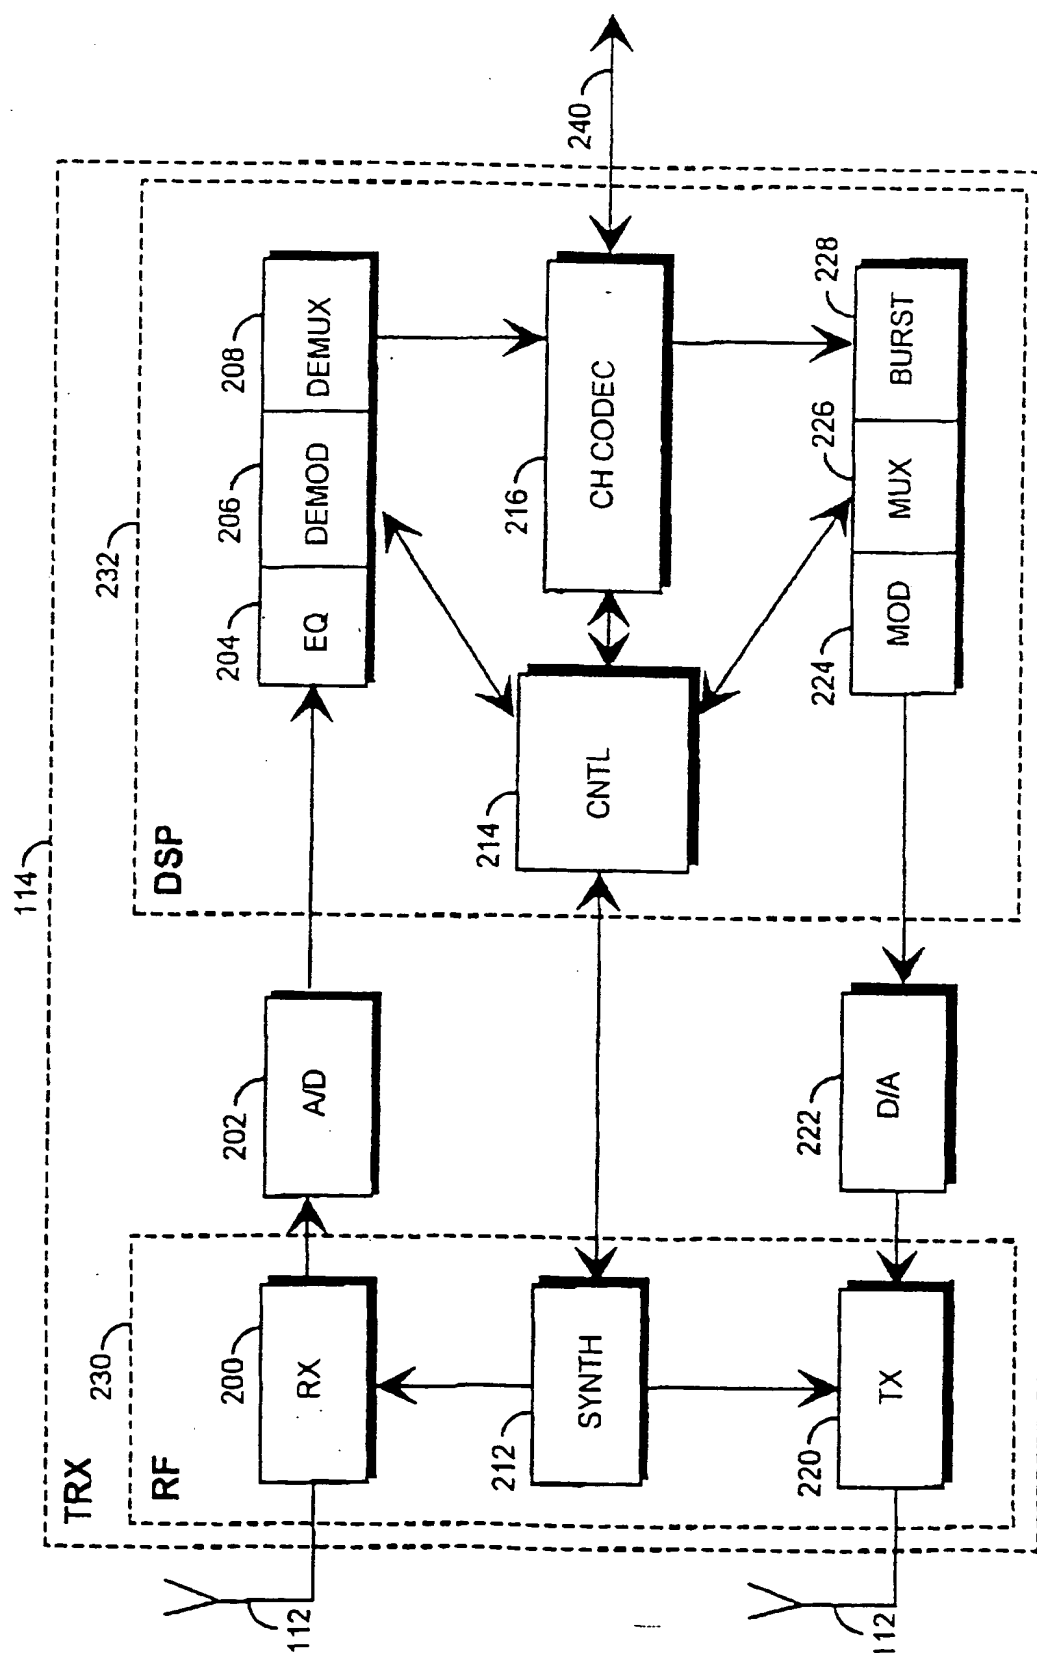


Fig 2

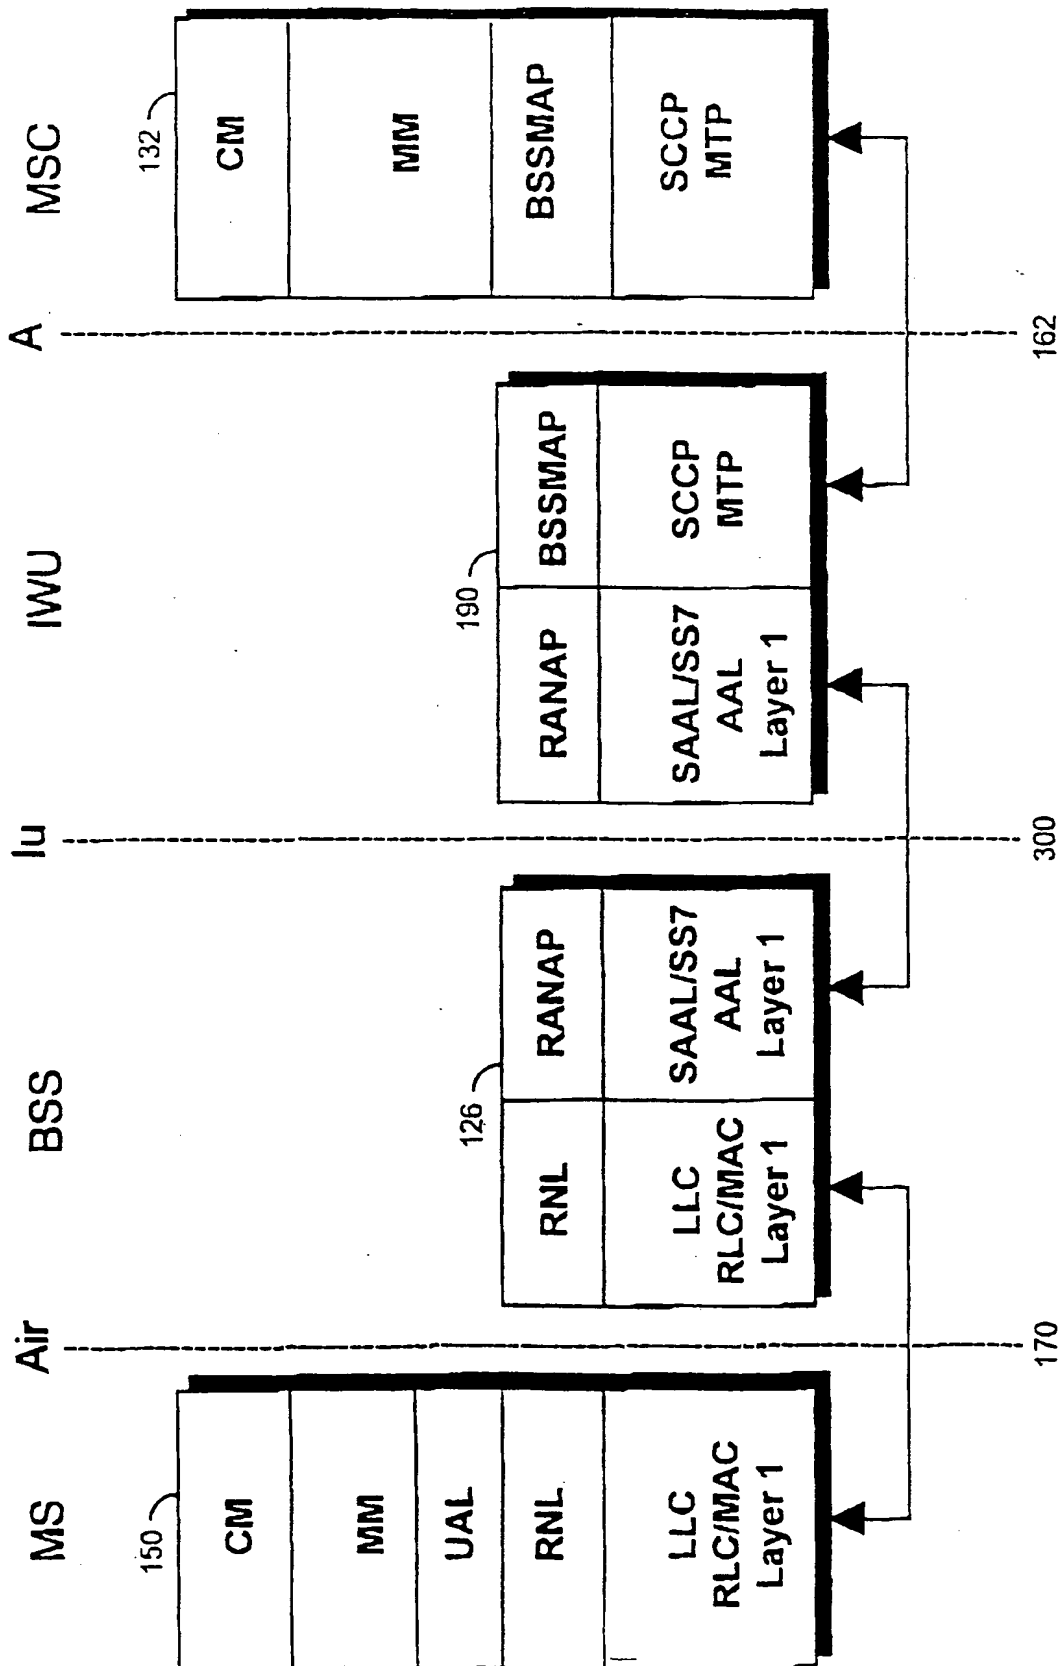


Fig 3

4/5

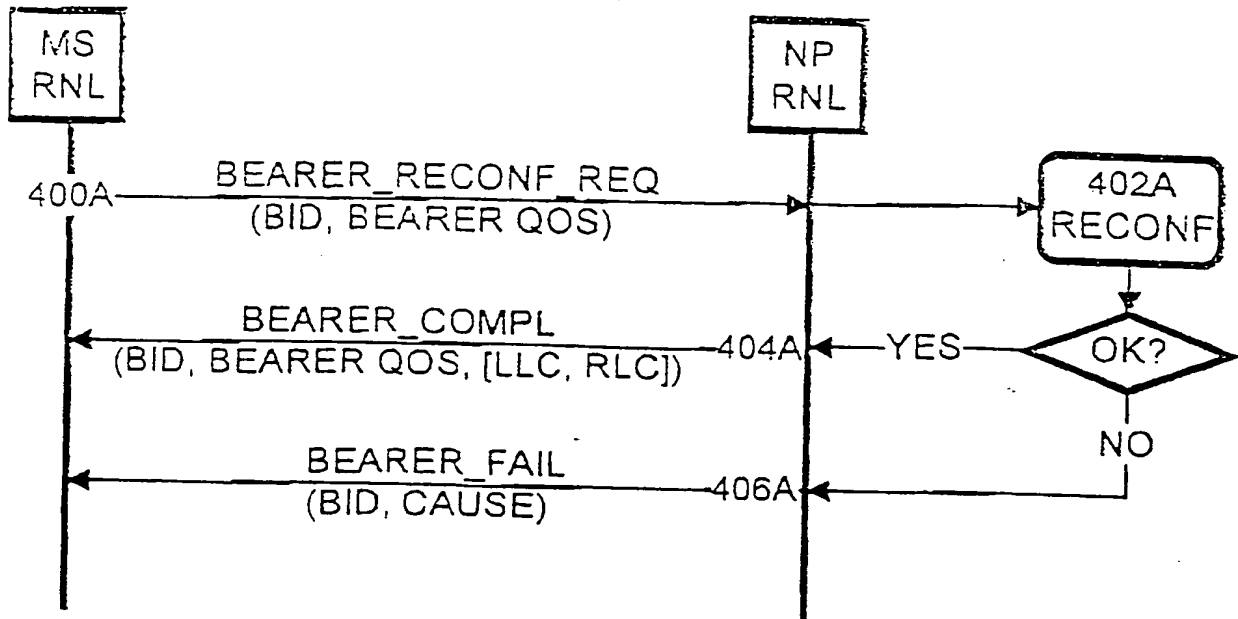


Fig 4A

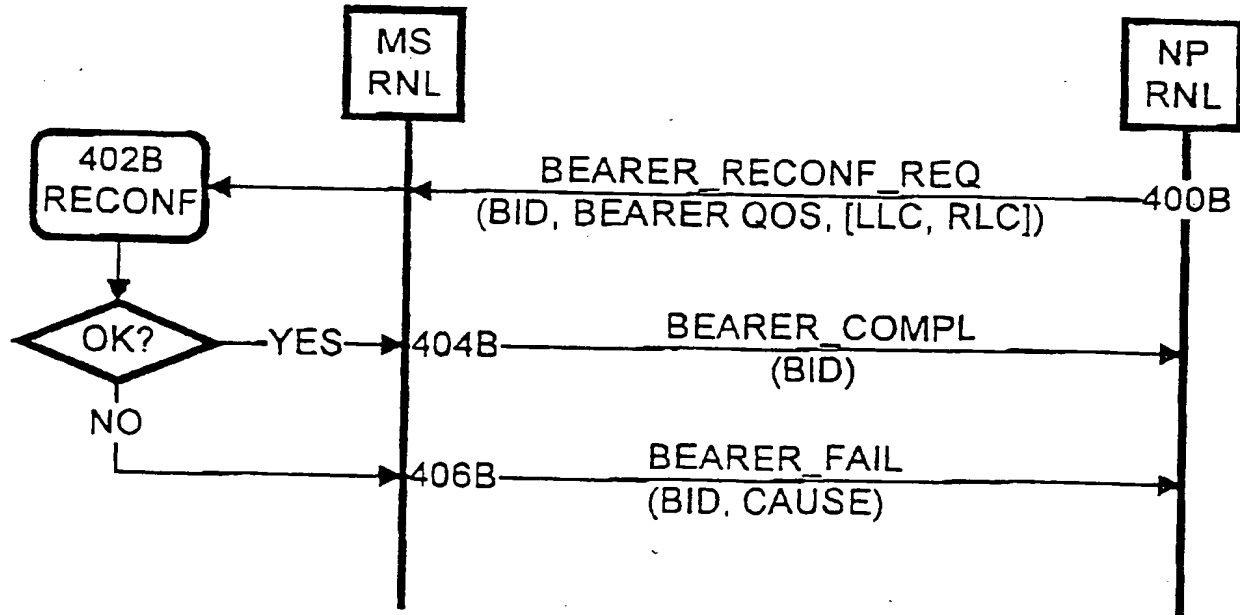


Fig 4B

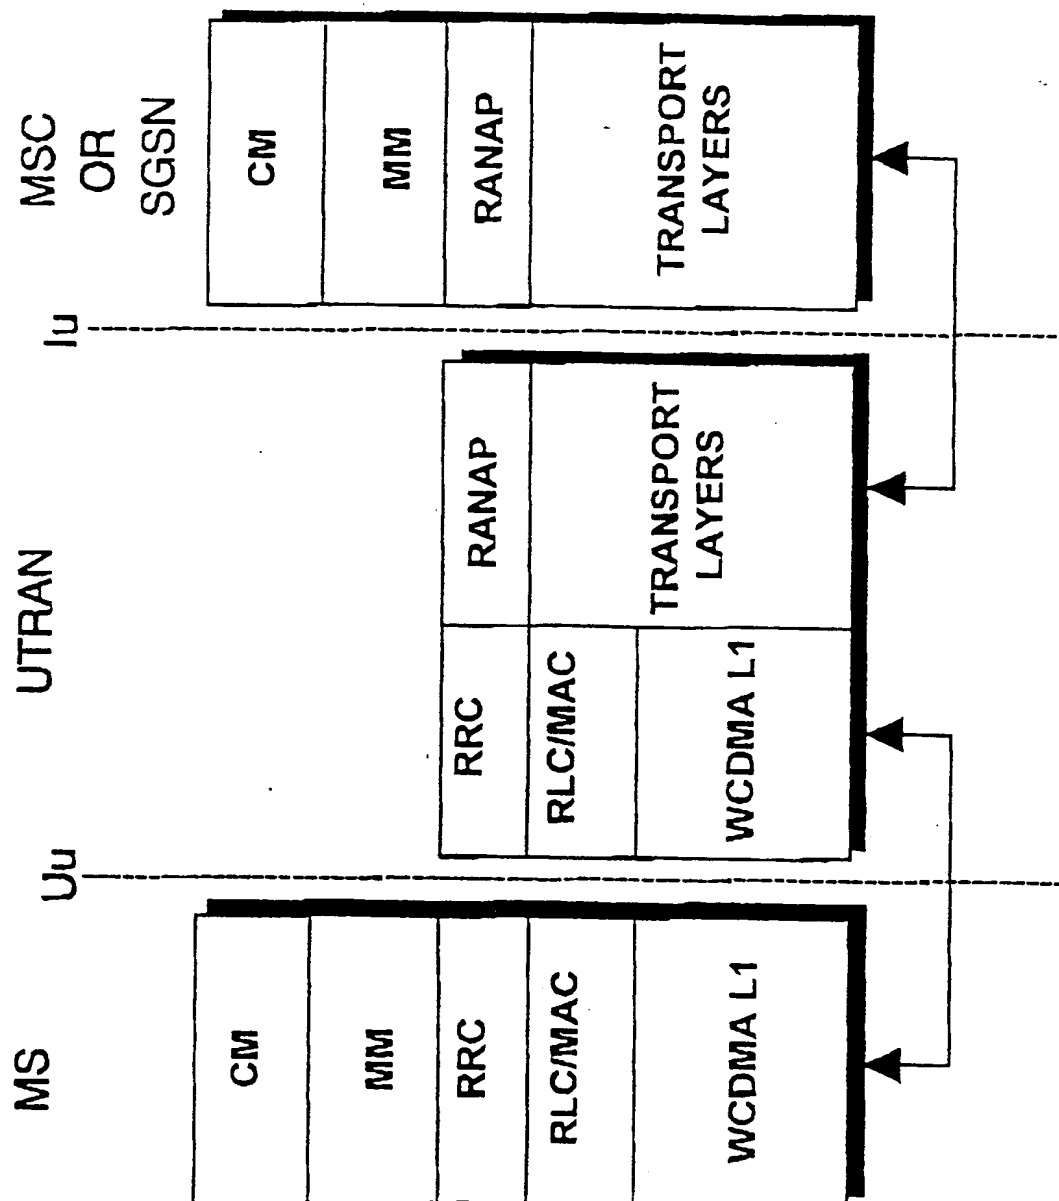


Fig 5

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference M.COSTA 7-7-	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/EP 00/ 05099	International filing date (day/month/year) 02/06/2000	(Earliest) Priority Date (day/month/year) 20/08/1999
Applicant LUCENT TECHNOLOGIES INC		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.
☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☒ because this figure better characterizes the invention.

3
☐ None of the figures.

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International Application No.

EP 00/05099

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SCHIEDER A ET AL: "GRAN - A NEW CONCEPT FOR WIRELESS ACCESS IN UMTS" ISS. WORLD TELECOMMUNICATIONS CONGRESS. (INTERNATIONAL SWITCHING SYMPOSIUM), CA, TORONTO, PINNACLE GROUP, 21 September 1997 (1997-09-21), pages 339-345, XP000704485	1, 3, 4
Y	page 339, column 2, line 20 - line 25 --- -/--	2

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 September 2000

Date of mailing of the international search report

04/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Leouffre, M

This Page Blank (uspto)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 00/05099

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>BERRUTO E ET AL: "ARCHITECTURAL ASPECTS FOR THE EVOLUTION OF MOBILE COMMUNICATIONS TOWARD UMTS"</p> <p>IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, US, IEEE INC. NEW YORK, vol. 15, no. 8, 1 October 1997 (1997-10-01), pages 1477-1486, XP000721279</p> <p>ISSN: 0733-8716</p> <p>page 7, column 2, line 19 - line 22</p> <p>---</p>	2
X	<p>WO 99 39528 A (NOKIA TELECOMMUNICATIONS OY ; VIALEN JUKKA (FI); BRITSCHGI JUHANA ())</p> <p>5 August 1999 (1999-08-05)</p> <p>page 6, line 5 - line 19; figure 1</p> <p>---</p>	1,3,4
X	<p>US 5 721 762 A (SOOD PREM)</p> <p>24 February 1998 (1998-02-24)</p> <p>column 4, line 38 - line 41</p> <p>---</p>	1
P,X	<p>WO 99 52307 A (ERICSSON TELEFON AB L M)</p> <p>14 October 1999 (1999-10-14)</p> <p>abstract; figure 1</p> <p>---</p>	1,3,4
E	<p>WO 00 42792 A (NOKIA NETWORKS OY ; OHVO MIKKO (FI); RAESAENEN JUHA (FI))</p> <p>20 July 2000 (2000-07-20)</p> <p>figure 1</p> <p>-----</p>	1,3,4

This page Blank (uspto)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/05099

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9939528	A	05-08-1999	FI 980208 A AU 8982298 A	30-07-1999 16-08-1999
US 5721762	A	24-02-1998	JP 9215061 A	15-08-1997
WO 9952307	A	14-10-1999	AU 3857199 A	25-10-1999
WO 0042792	A	20-07-2000	NONE	

This Page Blank (uspto)